

DECLARATION OF PERFORMANCE No 13/SZ/16

1. Unique identification code of the product-type: **LMX-10**
2. Intended use/es: **Nailed-in plastic anchor for fixing of external thermal insulation composite systems with rendering in concrete and masonry substrates.**
3. Manufacturer: **Klimas Sp. z o.o.
ul. Wincentego Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów**
4. Authorised representative: **Not applicable**
5. System/s of AVCP: **system 2+**
6. European Assessment Document: **a) Guidelines EAD 330196-01-0604 edition 10/2017
b) European Technical Assessment ETA-16/0509 of 09/02/2023
c) Deutsches Institut für Bautechnik – DIBt
d) Technical Assessment Body Nr. 1488**
7. Declared performance/s:

Essential characteristic	Performance												
Characteristic resistance	Base material	Concrete C12/15	Concrete C16/20-C50/60	Clay bricks MZ	Calcium silicate bricks KS	Calcium silicate hollow block KSL	Vertically perforated ceramic block MEGA-MAX	Vertically perforated clay brick Porotherm 25	Vertically perforated clay bricks HLZ	Lightweight concrete hollow blocks HBL	Lightweight concrete blocks LAC	Autoclaved concrete blocks 350 kg/m ³	Autoclaved concrete blocks 650 kg/m ³
	NRk[kN]	0,75	0,90	0,90	0,90	0,90	NPD	0,50	0,90	NPD	0,90	0,75	0,90
Edge distances and spacing	Min. allowable spacing s _{min} = 100mm						Min. allowable edge distance c _{min} = 100mm						
Displacement	N[kN]/ δ[mm]	0,25/1,3	0,3/1,5	0,3/0,8	0,3/1,0	0,3/1,3	NPD	0,17/0,8	0,3/1,7	NPD	0,3/1,0	0,25/2,4	0,3/1,4
Plate stiffness	Diameter of the anchor plate						60mm						
	Load resistance of the anchor plate						1,02kN						
	Plate stiffness						0,5kN/mm						
Point thermal transmittance	Point thermal transmittance coefficient						0,004W/K* / 0,002W/K**						
	Insulation thickness						30-260mm						

NRk – characteristic resistance ; N – tension load ; δ – displacements *) surface mount; **) immersed mount

8. Appropriate Technical Documentation and/or Specific Technical Documentation: **Not applicable**

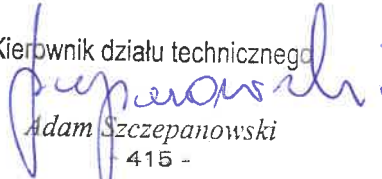
The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Kuźnica Kiedrzyńska
09.02.2023

[place]
[date of issue]

Kierownik działu technicznego


Adam Szczepanowski
415 -

[name]
[signature]